



Spring Centered Directional Valves


DG4S4-01*(*)C-(*)-50

DG4S2-012C-(*)-50

Voltage	Solenoid S/A (2 Req'd)			
	S/A Complete		Coil	
	Std	F3	Std	F3
115 AC 60	281291	317767	316011	317768
230 AC 60	281292	317769	298721	317770
460 AC 60	281293	317771	298722	317772

Note
For 50/60 Cycle Solenoids
See Back Page

For additional solenoid S/A's
see I-3544-S.

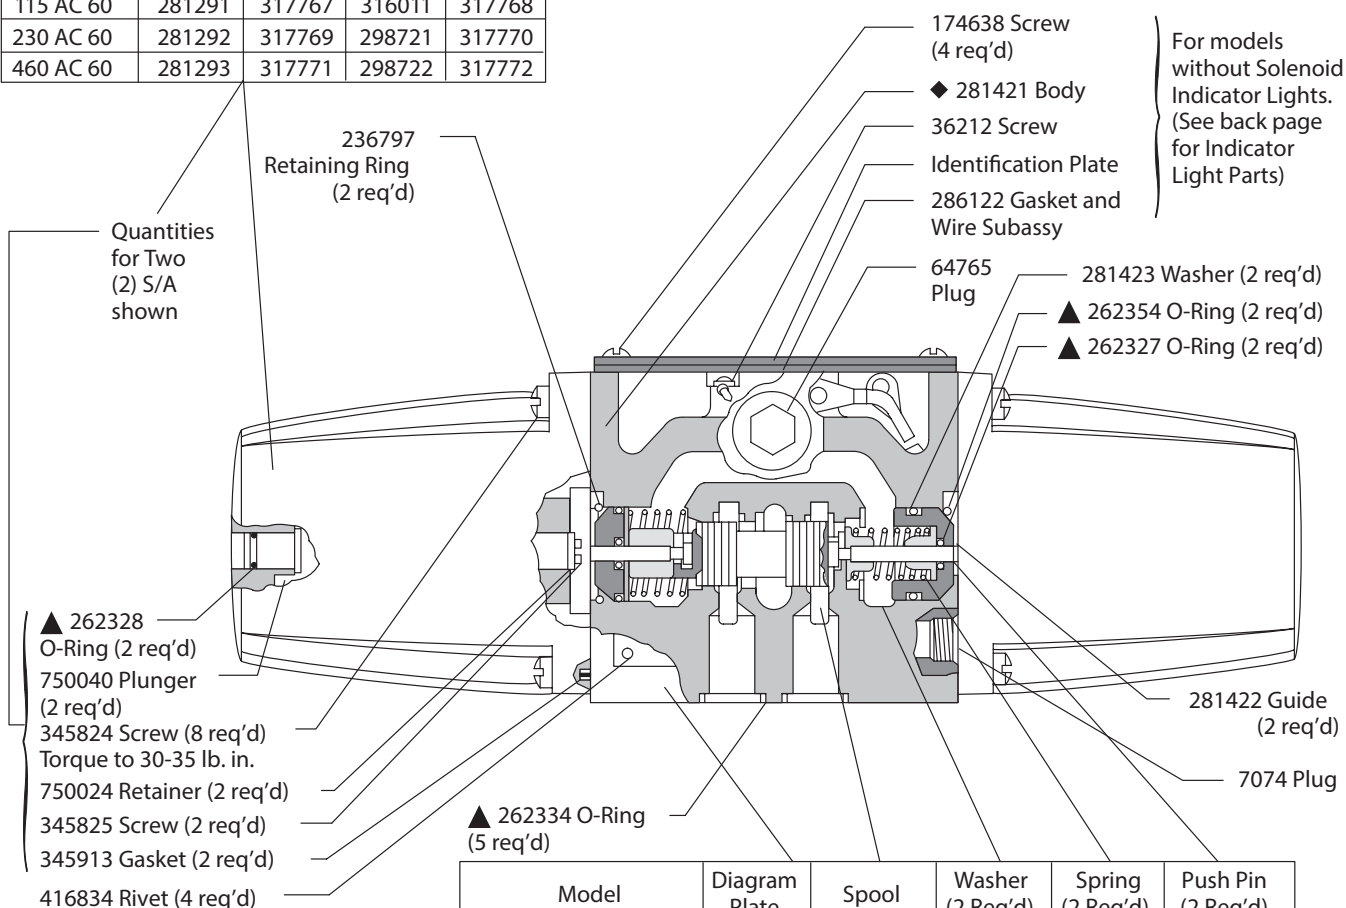

Model	Diagram Plate	Spool	Washer (2 Req'd)	Spring (2 Req'd)	Push Pin (2 Req'd)
DG4S2-012C-(*)-50	290339	289186			
DG4S4-010C-(*)-50	290341	213230			
DG4S4-011C-(*)-50	290342	※276278			
DG4S4-012C-(*)-50	290343	213231			
DG4S4-013C-(*)-50	290344	※239903			
DG4S4-016C-(*)-50	290345	213232			
DG4S4-0168C-(*)-50	577480	213232			
DG4S4-017C-(*)-50	290346	236624			
DG4S4-0178C-(*)-50	577482	236624			
DG4S4-018C-(*)-50	290340	235637	□ 283637	217323	290264
DG4S4-0133C-(*)-50	577484	236615	211846	290072	213268

※ Assemble relieved land of type 1 & narrow land of type 3 spools toward "A" port.


□ Assemble on spool with sharp break edge toward spring.

▲ Included in 919214 Seal Kit

◆ Not Available for Sale

Solenoid Indicator Light Kit (Includes All Parts Identified)	
Voltage Range	Kit
100 thru 125	941615

Note
Refer to parts drawing
I-3487-S for models with
plug-in feature.

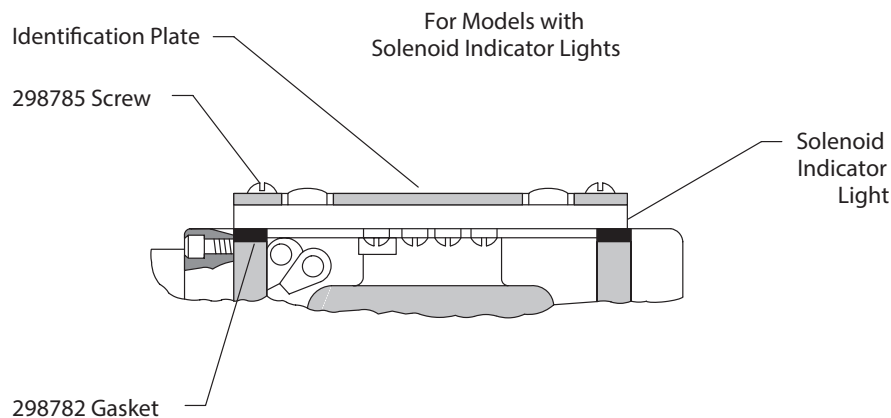

50/60 Hertz Solenoids		
Model	Solenoid S/A (2 req'd)	Coil
DG*S4-***-115AC-50/60-5*	751137	751057
F3-DG*S4-***-115AC-50/60-5*	751407	751406

Lead Wire Identification
Red Lead - Common
Yellow Lead - 60 Hz
Blue Lead - 50 Hz



CAUTION

For 50 cycle operation use Red and Blue Leads.
For 60 cycle operation use Red and Yellow Leads.
Do not use Blue and Yellow Leads together.

Model Code

(F3) - DG4S * (L) - 01 * C - (AC**) - 50**

1 2 3 4 5 6 7 8 9

1 Seal Material

F3 - Seals for mineral oil and fire resistant fluids

2 Model Series

DG4S - Directional valve, gasket mounted, solenoid operated, sliding spool

3 Flow Directions

2 - 2 way
4 - 4 way

4 L-Solenoid Indicator Light

Omitted - None

5 Series

6 Spool Type

7 Spring Centered

8 Solenoid Voltage and Frequency

Omitted-115AC60
Standard

9 Design

For satisfactory service life of these components, use full flow filtration to provide fluid which meets ISO cleanliness code 20/18/15 or cleaner. Selections from Danfoss OFP, OFR, and OFRS series are recommended.

Products we offer:

- Cartridge valves
- DCV directional control valves
- Electric converters
- Electric machines
- Electric motors
- Gear motors
- Gear pumps
- Hydraulic integrated circuits (HICs)
- Hydrostatic motors
- Hydrostatic pumps
- Orbital motors
- PLUS+1® controllers
- PLUS+1® displays
- PLUS+1® joysticks and pedals
- PLUS+1® operator interfaces
- PLUS+1® sensors
- PLUS+1® software
- PLUS+1® software services, support and training
- Position controls and sensors
- PVG proportional valves
- Steering components and systems
- Telematics

Hydro-Gear

www.hydro-gear.com

Daikin-Sauer-Danfoss

www.daikin-sauer-danfoss.com

Danfoss Power Solutions is a global manufacturer and supplier of high-quality hydraulic and electric components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market as well as the marine sector. Building on our extensive applications expertise, we work closely with you to ensure exceptional performance for a broad range of applications. We help you and other customers around the world speed up system development, reduce costs and bring vehicles and vessels to market faster.

Danfoss Power Solutions – your strongest partner in mobile hydraulics and mobile electrification.

Go to www.danfoss.com for further product information.

We offer you expert worldwide support for ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide you with comprehensive global service for all of our components.

Local address:

**Danfoss
Power Solutions (US) Company**
2800 East 13th Street
Ames, IA 50010, USA
Phone: +1 515 239 6000

**Danfoss
Power Solutions GmbH & Co. OHG**
Krokamp 35
D-24539 Neumünster, Germany
Phone: +49 4321 871 0

**Danfoss
Power Solutions ApS**
Nordborgvej 81
DK-6430 Nordborg, Denmark
Phone: +45 7488 2222

**Danfoss
Power Solutions Trading
(Shanghai) Co., Ltd.**
Building #22, No. 1000 Jin Hai Rd
Jin Qiao, Pudong New District
Shanghai, China 201206
Phone: +86 21 2080 6201

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.